



SURFOMETER[®]

S E R I E S

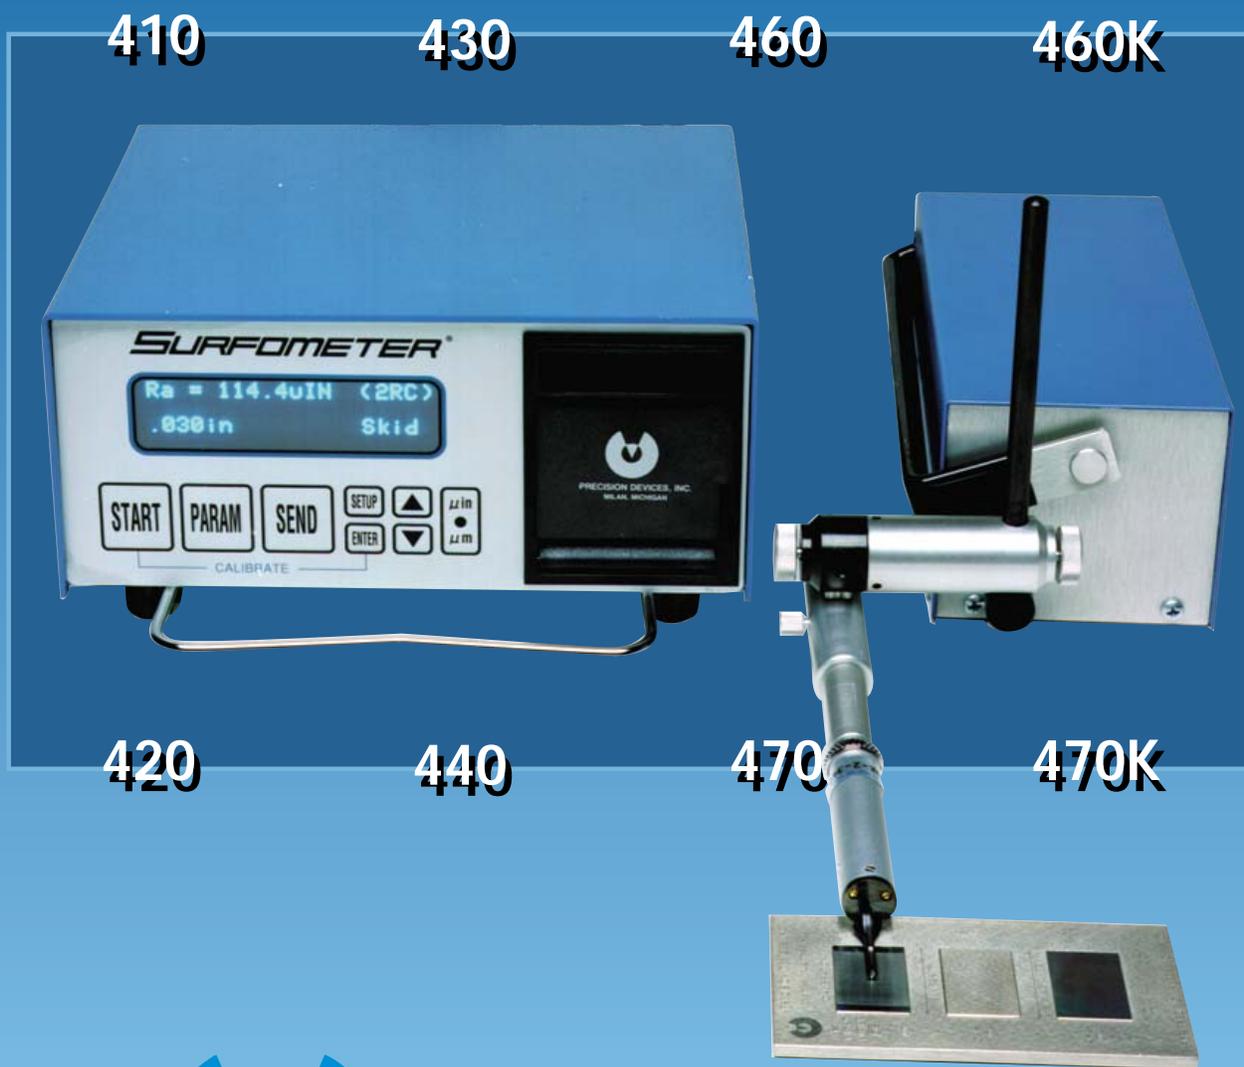

PRECISION DEVICES, INC.

The 400 series

Always at the forefront of technological development in surface measurement systems, PDI introduces the completely modular Series 400.

All 400 series models utilize the same basic hardware, with model differences determined by the software installed, style of tracer and optional plotter. Starting with a basic Ra (Roughness Average) system, the units may be upgraded for future needs by simply adding parameter modules. Simplicity is also inherent in the operation of the instrument, with prompts to guide the operator as the system gathers data, calculates the results and automatically displays the selected parameter, cutoff and system settings. The vacuum fluorescent display is bright and has a wide viewing angle, making it easy to read from any position.

The Amplifier

The Series 400 Amplifier is a sophisticated yet easy to use instrument with a modular surface texture program.

All models feature a vacuum fluorescent display and sealed membrane keypad. An RS-232 communication port is standard (RS-485 optional), along with a remote start switch port and lockout key switch. Battery power is included on all models with the graphic plotter, and is optional on all other models.

Operation is at once simple, sophisticated and secure. The instrument is configured by an easy-to-use set-up menu. The user selects the proper settings for the cutoff, stroke length, standard 2RC and Gaussian filters (Rk filter optional), parameter functions, serial port and plotter operation. Set the exact stroke length required or use the standard 5-cutoffs. After setting, the programming can be secured by a turn of the lockout key, which prevents inadvertent changes. Once configured, the system operates by pressing the Start Button or through use of an optional remote start switch.




SERIES 400 MODELS

SKID-REFERENCED MODELS	PARAMETERS AVAILABLE	SKIDLESS MODELS
MODEL 410 Single Parameter Unit	Ra (Roughness Average)	MODEL 420 Single Parameter Unit
MODEL 430 Multiple Parameter Unit	Ra Plus: Rq, Rt, Rt (1-5), Rmax, Rp, Rpm, R3z, Pc, Rz, Rz (DIN), Rz (ISO), Rv	MODEL 440 Multiple Parameter Unit
MODEL 460 Advanced Parameter Unit	All the above, plus: tp, Htp, Hsc, Sm, Rsk, & Rku	MODEL 470 Advanced Parameter Unit
MODEL 460K Rk Parameter Unit	All the above plus: Rk, Rpk, Rvk, Mr1, Mr2, Rpk*, Rvk*, Vo, Δa, Δq, λa, λq	MODEL 470K Rk Parameter Unit

Piloters/Motor Drives

The Skid-Referenced Piloter

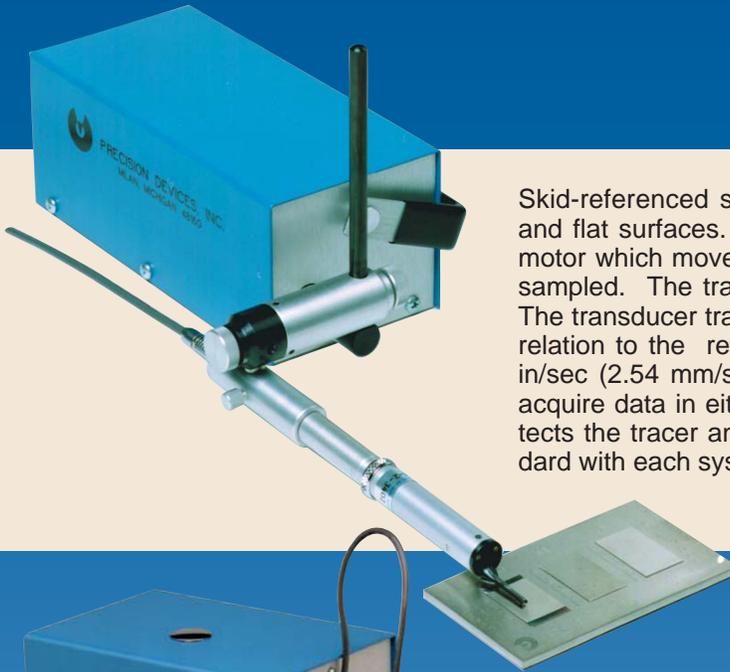


Skid-referenced systems are designed to measure normal I.D., O.D., and flat surfaces. The skid-referenced motor drive (piloter) contains a motor which moves the linkarm with the tracer across the surface to be sampled. The tracers have skidpads which establish a reference line. The transducer translates the vertical motion of the diamond tip stylus in relation to the reference line. The piloter traverses at a speed of 0.1 in/sec (2.54 mm/sec) for the travel length specified and can be set to acquire data in either direction. Our patented Lite-Touch Linkarm protects the tracer and surface from inadvertent damage and comes standard with each system, unless otherwise specified.

The Skidless Piloter



The skidless motor drive has an internal reference in the drive unit. Skidless instruments of the 400 Series are designed to evaluate small, difficult-to-reach areas that are not accessible by skid-type tracers. The motor drive is mounted on a granite base to minimize vibration and to provide a level, stable surface for locating the workpiece. For more precise measurement setup, the stroke length can be set to the proper distance for the surface being measured. This is ideally suited for short stroke requirements such as grooves. This drive may also be programmed to acquire data in either direction.

The Rotary Piloter

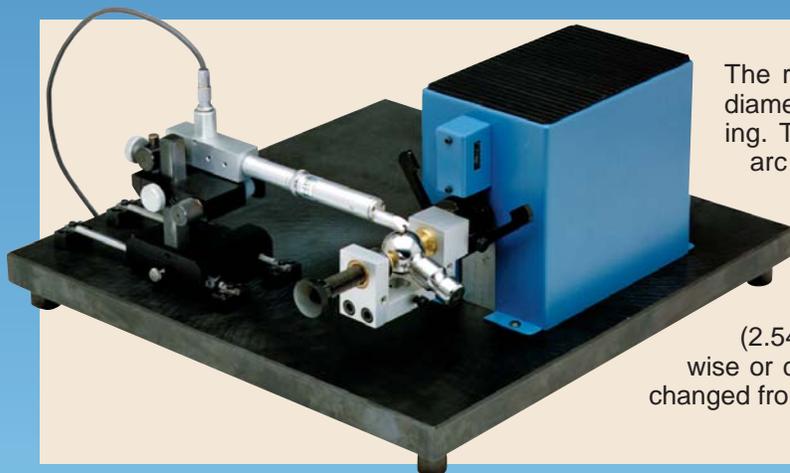

The rotary piloter is designed to measure inside and outside diameters of parts such as balls, ball studs, and extruded tubing. The part is rotated across a stationary tracer, through an arc perpendicular to the lay. The drive, with proper tooling, will trace parts with a range from 6.35 mm to 63.5 mm (0.250 in to 2.500 in) inner or outer diameter. The amplifier will automatically adjust the speed of the rotary piloter, based upon the diameter of the measurement area, to attain a constant speed of 0.1 in/sec (2.54 mm/sec). The piloter is able to take readings in clockwise or counterclockwise directions. It is easy to use, and can be changed from one part to another in seconds.

Specifications & Features

AMPLIFIER

Filters	Standard: 2RC and Digital Gaussian; Optional: DIN 4776 (Rk)
Cutoff Values	0.08 mm (0.003 in) 0.25 mm (0.010 in) 0.8 mm (0.030 in) 2.5 mm (0.100 in)
P_C Threshold Values	Adjustable from 0 μm to 12.7 μm (0 μin to 500 μin)
Wavelength Sensitivity	Cutoff to 2.5 μm (100 μin)
Dynamic Range	150 μm (6000 μin) total peak-to-valley max
Display	Digital 2 x 20 character vacuum fluorescent
Keypad	Sealed membrane
Serial Port	Standard: RS-232 Interface; Optional: RS-485 SPC data collection or serial printer modes user selectable Serial Command Protocol for remote computer control, monitoring and data transfer available
Lockout Key Switch	Standard; locks amplifier settings so they cannot be changed
Remote Start Switch Connector	Standard; allows for optional external START switch
Power Supply	Input: 120 ± 5% V AC, 60 hz Output: 12 V DC, 1.2 A Other options available
Temperature Range	Operation: 10° to 32° Celsius (50° to 90° Fahrenheit) Storage: -1° to 43° Celsius (30° to 110° Fahrenheit)
Relative Humidity	10% to 90% non-condensing
Physical Dimensions	220 mm L x 234 mm W x 111 mm H (8 5/8 in L x 9 3/16 in W x 4 3/8 in H (without handle)
Weight	2.16 kg (4 lb 12 oz) 3.52 kg (7 lb 12 oz) with battery 3.86 kg (8 lb 8 oz) with battery and graphic plotter

Optional Battery

Battery Type	Sealed gel cell
Battery Life	Over 8 hours of continuous use (including plotting) between overnight charges


Optional Thermal Graphic Plotter

An internal graphic plotter can be added to any of the 400 series amplifiers. The plotter is totally configurable to produce output that is appropriate to the user's needs.

Plotter operation can be disabled, enabled or set for automatic plot. The user may print any combination of setup information, parameter values, roughness profile and Bearing Area Curve (BAC). The roughness profile printout has selectable horizontal and vertical magnification.

```

Surfometer PDA-400kPV
Precision Devices Inc.
Milan, Michigan Ver 2.30
1:52:01 pm 7/17/96
Ra = 18.1um
Rq = 23.5um
Rt = 187.8um
Rmax = 187.8um
Rz = 142.5um
Rziso = 154.0um
Rzdin = 142.5um
Rsz = 101.5um
Rpm = 83.4um
Rp = 88.4um
Rv = 99.3um
Rk = 53.4um
Rpk = 22.0um
Rvk = 32.1um
Rpk* = 54.7um
Rvk* = 77.1um
Mr1 = 7.6%
Mr2 = 85.3%
Vo = 2.4um
Dq = .15
Dg = .10
Lq = 772.4um
Ld = 1452.4um
Rsk = -.36
Rku = 3.99
Sm = 777.9um
tp = 11.6%
Htp = 65.2um
Hsc = 103/evl(10um)
Pc = 593/in(10um)
tp1 = 5%
tp2 = 90%
Refer. Line = 5%
Slice Depth = 10.0um
Eval. Length = 158in
Cutoff Len. = .030in
# of Cutoff = 5
R. Filter = Gaussian
    
```

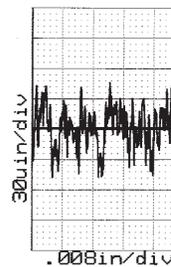

Optional Graphic Plotter

Grid size	6 mm x 6 mm (0.24 in x 0.24 in)
Writing Method	Direct Thermal
Resolution	32 dots/mm Y-axis, 8 dots/mm X-axis (800 dots/in Y-axis, 200 dots/in X-axis)
Chart Speed	25 mm/sec (1 in/sec)
Print Width	48 mm (1.89 in)
Paper	5.1 cm x 30.5 m (2 in x 100 ft) roll, thermal graphic

PILOTERS/MOTOR DRIVES

Linear

Stroke Length	Adjustable from 1.27 mm to 12.7 mm (0.05 in to 0.50 in). For evaluation length of five cutoffs, the drive will traverse an additional two cutoffs for all cutoff values
Piloter Speed	2.54 mm/sec (0.1 in/sec)
Set Start Point	Sets the exact START point of the piloter to a selected position
Physical Dimensions	Skid-referenced: 203.2 mm L x 82.5 mm W x 95.3 mm H (8 in L x 3 1/4 in W x 3 3/4 in H) Skidless: 235 mm L x 146 mm W x 121 mm H (9 1/4 in L x 5 3/4 in W x 4 3/4 in H)
Weight	Skid-referenced: 2.1 kg (4 lb 10 oz) Skidless: 4.5 kg (10 lb) without Granite Base 84 kg (185 lb) with Granite Base

Rotary



Diameter Range	Standard: 6.35 mm to 63.5 mm (0.250 in to 2.500 in)
Piloter Speed	Automatically set by entering Part Diameter into Amplifier
Set Start Point	Sets the exact START point of the piloter to a selected position
Dimensions & Weight	Based upon part configuration

TRACER

Detection Method	Moving Coil
Stylus Material	Diamond
Stylus Tip Radius	Standard: 10 µm (0.0004 in) Optional: 5 µm (0.0002 in) and 2.5 µm (0.0001 in)
Stylus Force	0.016 N (1.6 gf) or less

PRECISION REFERENCE STANDARD

3-Patch Master	Consists of Calibration, Linearity and Diamond Stylus Condition Patches traceable to N.I.S.T.
-----------------------	---

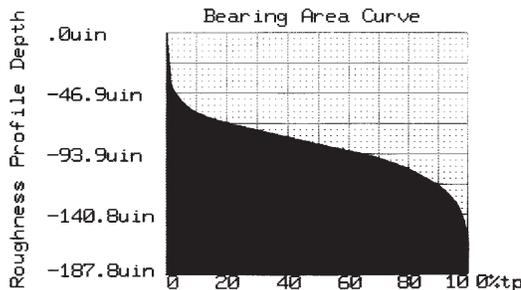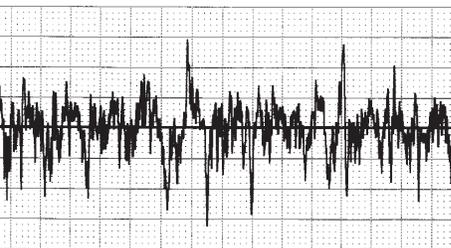

Depth	0.0000	0.0001	0.0002	0.0003	0.0004	0.0005	0.0006	0.0007	0.0008	0.0009	0.0010	0.0011	0.0012	0.0013	0.0014	0.0015	0.0016	0.0017	0.0018	0.0019	0.0020	0.0021	0.0022	0.0023	0.0024	0.0025	0.0026	0.0027	0.0028	0.0029	0.0030	0.0031	0.0032	0.0033	0.0034	0.0035	0.0036	0.0037	0.0038	0.0039	0.0040	0.0041	0.0042	0.0043	0.0044	0.0045	0.0046	0.0047	0.0048	0.0049	0.0050	0.0051	0.0052	0.0053	0.0054	0.0055	0.0056	0.0057	0.0058	0.0059	0.0060	0.0061	0.0062	0.0063	0.0064	0.0065	0.0066	0.0067	0.0068	0.0069	0.0070	0.0071	0.0072	0.0073	0.0074	0.0075	0.0076	0.0077	0.0078	0.0079	0.0080	0.0081	0.0082	0.0083	0.0084	0.0085	0.0086	0.0087	0.0088	0.0089	0.0090	0.0091	0.0092	0.0093	0.0094	0.0095	0.0096	0.0097	0.0098	0.0099	0.0100
tp%	0	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100																																																																																	

Surface Roughness Terminology & Parameters

Terminology

Sampling Length, l , is the nominal wavelength used for separating roughness and waviness. Also known as Cutoff Length or Cutoff.

Evaluation Length, L , is the length over which the values of surface parameters are evaluated. It is recommended that the evaluation length consist of five sampling lengths although it may comprise any number of sampling lengths. Also known as Assessment Length.


Mean Line, M , is the reference line about which the profile deviations are measured. The mean line of the roughness profile is usually established by analog or digital filters with the selected cutoff corresponding to the roughness sampling length.

Profile Peak is the point of maximum height on a portion of a profile that lies above the mean line and between two intersections of the profile with the mean line.

Profile Valley is the point of maximum depth on a portion of a profile that lies below the mean line and between two intersections of the profile with the mean line.

Profile Irregularity is a profile peak and the adjacent profile valley.


Ra, Rq

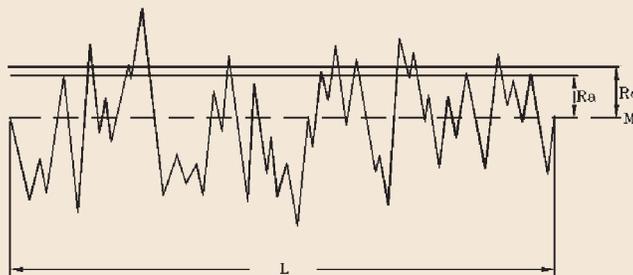

Roughness Average, Ra , is the arithmetic average of the absolute values of the profile heights over the evaluation length.

RMS Roughness, Rq , is the root mean square average of the profile heights over the evaluation length.

Rp, Rpm, Rv

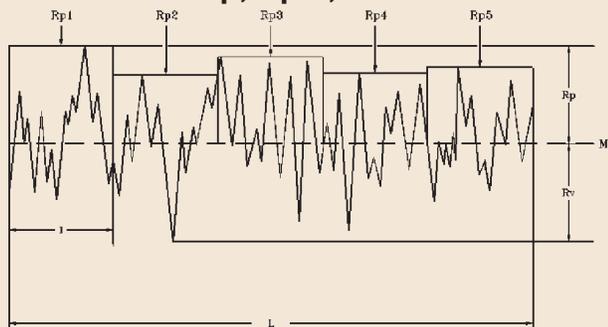


Maximum Profile Peak Height, Rp , the distance between the highest point of the profile and the mean line within the evaluation length.

Average Maximum Profile Peak Height, Rpm , is the average of the successive values of Rpi calculated over the evaluation length.


Maximum Profile Valley Depth, Rv , is the distance between the deepest valley of the profile and the mean line within the evaluation length.

Rz(ISO)

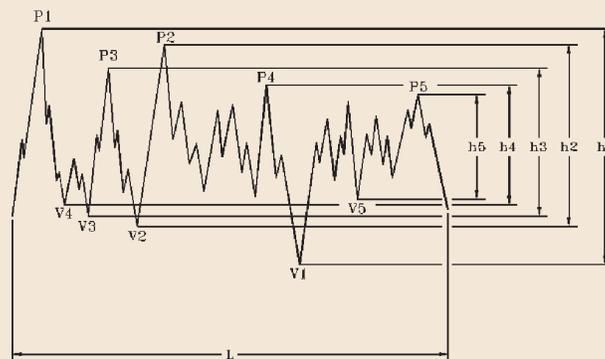

Ten Point Height of Irregularities, $Rz(ISO)$, is the average value of the absolute values of the heights of five highest profile peaks and the depths of five deepest profile valleys within the evaluation length.

Rt, Rti, Rz, Rz(DIN), Rmax

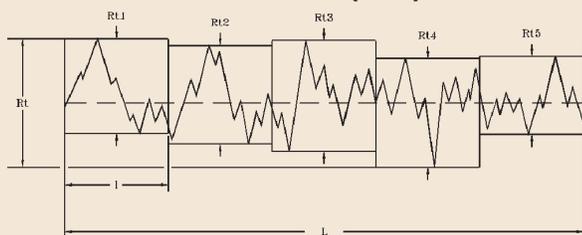


Maximum Height of the Profile, Rt , the vertical distance between the highest and lowest points of the profile within the evaluation length.

Maximum Height within a Sampling Length, Rti , the vertical distance between the highest and lowest points of the profile within a sampling length.

Average Maximum Height of the Profile, Rz , is the average of the successive values of Rti calculated over the evaluation length. This parameter is the same as $Rz(DIN)$ when there are five sampling lengths within the evaluation length.


Maximum Roughness Depth, $Rmax$, is the largest of the successive values of Rti calculated over the evaluation length.

R3z

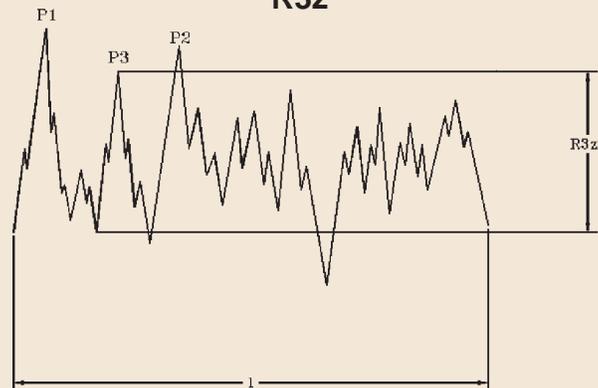

Third Maximum Peak-To-Valley Height, $R3z$, is the mean of the third maximum peak-to-valley heights in the evaluation length.


Pc

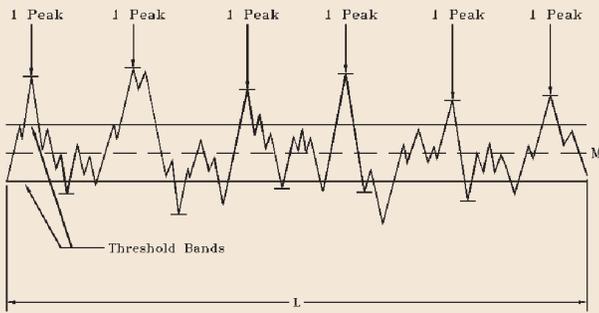

Peak Density, P_c , is the number of SAE peaks per unit length measured at a specified peak count level.

Note: An SAE peak (ANSI/ASME B46.1.1-1995) is a profile irregularity wherein the profile intersects consecutively a lower and upper boundary line.

Rsk

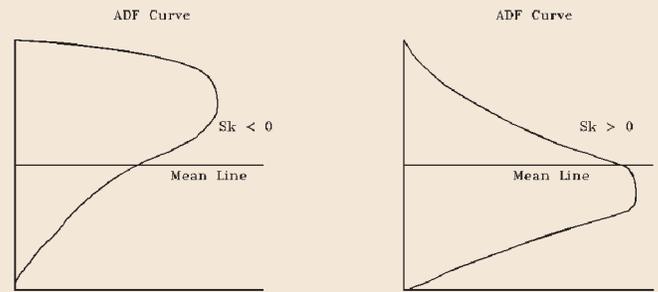


Skewness, R_{sk} , is a measure of the asymmetry of the profile about the mean line. A negative skewness indicates that a greater percentage of the profile is above the mean line and a positive value indicates that a greater percentage is below the mean line.

Sm




Mean Spacing of Profile Irregularities, S_m , is the mean value of the spacing between profile irregularities within the evaluation length.

tp

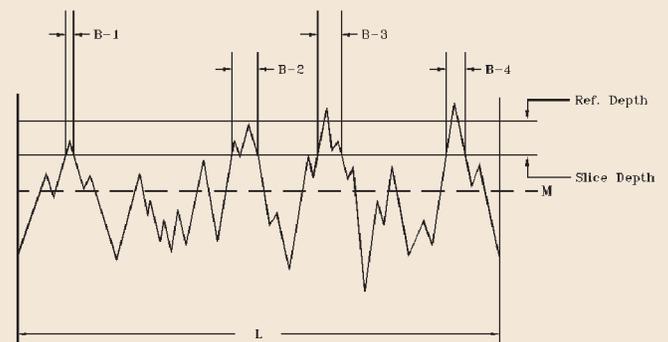

Profile Bearing Length Ratio, t_p , the ratio of the profile bearing length to the evaluation length at a specified level.

Rk, Rpk, Rvk, Mr1, Mr2, Rpk*, Rvk*, Vo

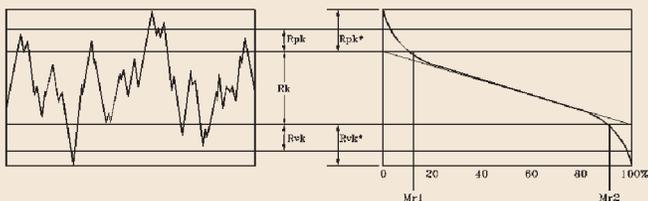

Core Roughness, R_k , is the core height of the profile along the Y-axis of the BAC curve generated by placing a 40% line on the curve at the minimum slope point and extending the lines to the 0% and 100% points.

Reduced Peak Height, R_{pk} , is the height on the Y-axis of a triangle with the same area as the BAC curve from the 0% point to the Mr_1 point.

Reduced Valley Depth, R_{vk} , is the height on the Y-axis of a triangle with the same area as the BAC curve from the Mr_2 point to the 100% point.

Peak Height, R_{pk}^* , is the distance between the highest profile peak and the intersection line of the surface ratio Mr_1 .

Valley Depth, R_{vk}^* , is the distance between the intersection line of the surface ratio Mr_2 and the deepest valley.

Retention Volume, V_o , is the area between the material ratio curve and the 100% material line below the core roughness.

Additional Parameters

Kurtosis, R_{ku} , is a measure of the peakedness of the profile about the mean line.

Average Absolute Slope, Δa , is the arithmetic average of the absolute value of the rate of change of the profile height calculated over the evaluation length.

RMS Slope, Δq , is the root mean square average of the rate of change of the profile height calculated over the evaluation length.


Average Wavelength, λa , is the average wavelength of the surface profile.

RMS Profile Wavelength, λq , is the RMS value of the profile wavelength.

Height Difference of Bearing Length Ratios, Htp , is the height difference between two points on the bearing ratio curve set at specified levels of t_{p1} and t_{p2} .

Terminology and Parameter Definitions are based upon the American Standard ASME B46.1-1995 for Surface Texture and the German Standard DIN 4776 for the R_k group of parameters.

Accessories

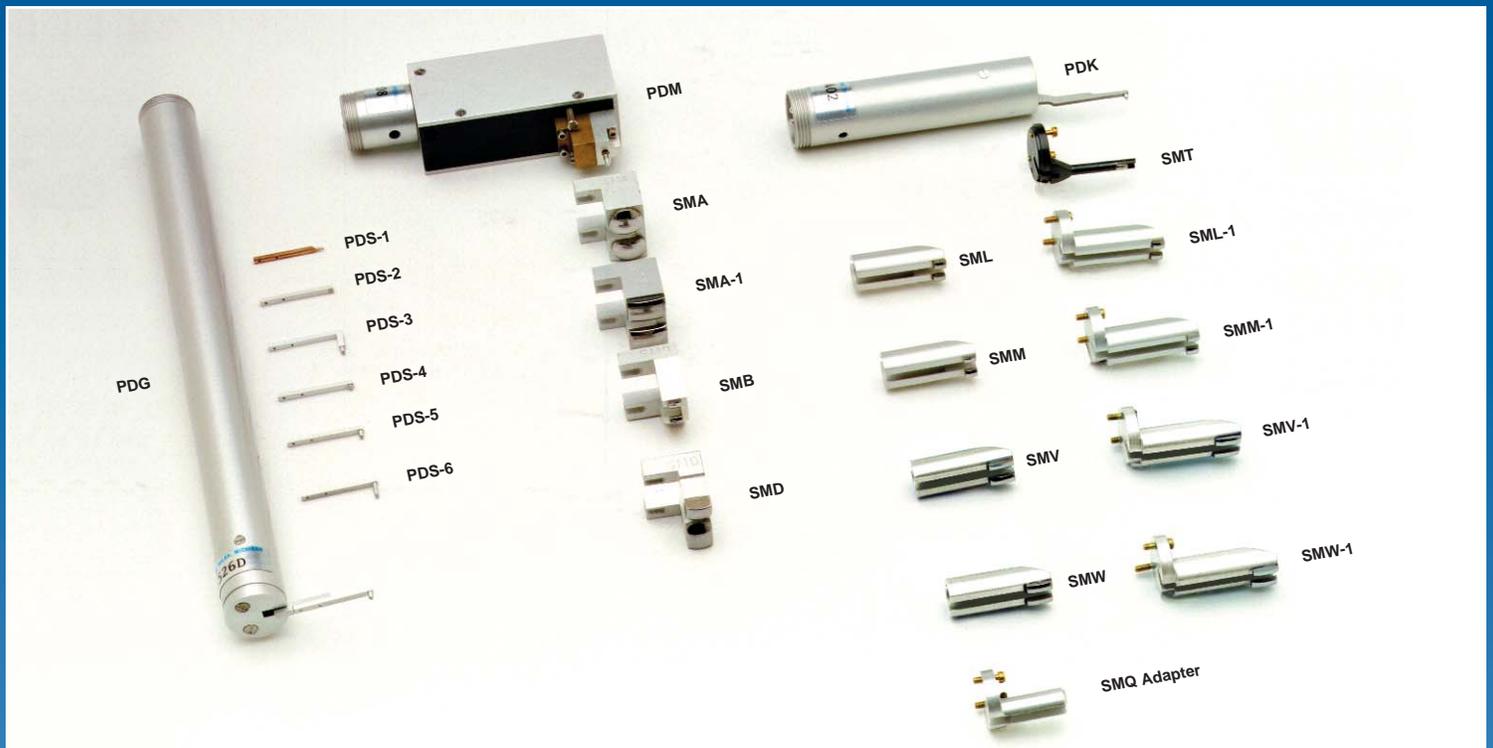

SKID-REFERENCED TRACERS

PDK

The versatile PDK tracer, with the single SMT skidmount, can measure a 1/8 in. I.D. and O.D. to flat surfaces. The PDK has a series of standard, interchangeable double skidmounts available for most surface texture requirements.

PDM

Rugged and durable, the PDM style tracer provides accurate reading throughout the surface texture measurement range. From super-fine to high micro finished, the PDM tracer offers the reliability for critical surface evaluation. Standard skidmounts permit measurements on outside diameters as small as 1/8 in to inside diameters from 1 13/16 in to flat surfaces.

SKIDLESS TRACER

PDG

The PDG tracer does not use skids, but has various standard stylus assemblies that mount onto the tracer beam.

Other standard tracers and accessories are available based upon specific applications. If a standard product does not meet your exact need, Precision Devices, Inc. will design and build a tracer or stylus assembly that will satisfy your requirements.

STANDARD SKIDMOUNTS

For PDK Tracers

SMT	3.2 mm (1/8 in) I.D. and O.D. to flat
SML	12.7 mm (1/2 in) I.D. to flat
SMM	9.5 mm (3/8 in) O.D. to flat
SMV	12.7 mm (1/2 in) I.D. to flat for 2.54 mm (0.100 in) cutoff
SMW	9.5 mm (1/2 in) O.D. to flat for 2.54 mm (0.100 in) cutoff
SMQ Adapter	Required for SML, SMM, SMV, and SMW skidmounts
SML-1	12.7 mm (1/2 in) I.D. to flat*
SMM-1	9.5 mm (3/8 in) O.D. to flat*
SMV-1	12.7 mm (1/2 in) I.D. to flat for 2.54 mm (0.100 in) cutoff*
SMW-1	9.5 mm (3/8 in) O.D. to flat for 2.54 mm (0.100 in) cutoff*

*No adapter

For PDM Tracers

SMA	19 mm (3/4 in) O.D. and 46 mm (1 13/16 in) I.D. to flat
SMB	9.5 mm (3/8 in) O.D. to flat
SMD	3.2 mm (1/8 in) to 12.7 mm (1/2 in) O.D. only

SME	19 mm (3/4 in) O.D. to flat, for sideways tracing
SMA-1	19 mm (3/4 in) O.D. and 46 mm (1 13/16 in) I.D. to flat for 2.54 mm (0.100 in) cutoff and 7.62 mm (0.300 in) cutoffs
SMB-1	9.5 mm (3/8 in) O.D. to flat for 2.54 mm (0.100 in) cutoff

STYLUS ASSEMBLIES

For PDG Tracers

PDS-1	Diamond depth 0.05 mm (0.002 in)
PDS-2	Diamond depth 0.5 mm (0.020 in)
PDS-3	Diamond depth 6.5 mm (0.260 in)
PDS-4	Diamond depth 1.2 mm (0.050 in)
PDS-5	Diamond depth 2.2 mm (0.090 in)
PDS-6	Diamond depth 4.5 mm (0.177 in)

LINKARMS, EXTENSIONS

Standard and special linkarms and linkarm extensions are also available. Contact your Precision Devices representative for additional information.



PRECISION DEVICES, INC.

606 County Street, P.O. Box 220, Milan, MI 48160-0220 (734) 439-2462 FAX: (734) 439-1461
e-mail: sales@predev.com website: <http://www.predev.com>

PD400-6M-398